

AD-A195 529

ADA (TRADE NAME) COMPILER VALIDATION SUMMARY REPORT:
IBM CORPORATION IBM D. (U) INFORMATION SYSTEMS AND
TECHNOLOGY CENTER W-P AFB OH ADA VALI.. 19 MAY 88


171


UNCLASSIFIED

AVF-VSR-82.1087

F/G 12/5

NL

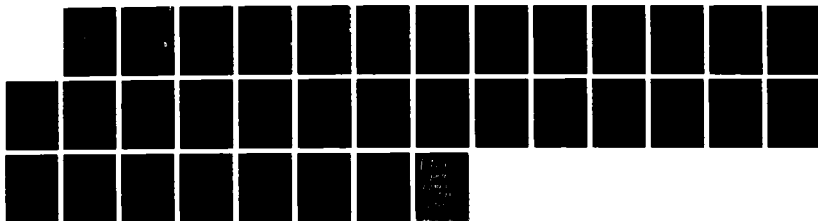



AD-A195 529

E (When Data Entered)

ENTATION PAGE

READ INSTRUCTIONS
BEFORE COMPLETING FORM

12. GOVT ACCESSION NO.

3. RECIPIENT'S CATALOG NUMBER

4. TITLE (and Subtitle)

Ada Compiler Validation Summary Report: IBM Corporation. IBM Development System for the Ada Language System, Version 1.1.0, IBM 4381 under VM/SP CMS, Release 3.6.

5. TYPE OF REPORT & PERIOD COVERED
19 May 1987 to 19 May 1988

6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s)

Wright-Patterson AFB OH 45433-6503

8. CONTRACT OR GRANT NUMBER(s)

9. PERFORMING ORGANIZATION AND ADDRESS

Wright-Patterson AFB OH 45433-6503

10. PROGRAM ELEMENT, PROJECT, TASK
AREA & WORK UNIT NUMBERS

11. CONTROLLING OFFICE NAME AND ADDRESS

Ada Joint Program Office
United States Department of Defense
Washington, DC 20301-3081

12. REPORT DATE
19 May 198713. NUMBER OF PAGES
33 p.

14. MONITORING AGENCY NAME & ADDRESS (If different from Controlling Office)

Wright-Patterson AFB OH 45433-6503

15. SECURITY CLASS (of this report)
UNCLASSIFIED15a. DECLASSIFICATION/DOWNGRADING
SCHEDULE
N/A

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20. If different from Report)

UNCLASSIFIED

18. SUPPLEMENTARY NOTES

19. KEYWORDS (Continue on reverse side if necessary and identify by block number)

Ada Programming language, Ada Compiler Validation Summary Report, Ada Compiler Validation Capability, ACVC, Validation Testing, Ada Validation Office, AVO, Ada Validation Facility, AVF, ANSI/MIL-STD-1815A, Ada Joint Program Office, AJPO

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

IBM Development System for the Ada Language System, Version 1.1.0, International Business Machines Corporation, Wright-Patterson AFB. IBM 4381 under VM/SP CMS, Release 3.6 (host and target). ACVC 1.8.

DD FORM 1473

EDITION OF 1 NOV 65 IS OBSOLETE

1 JAN 73

S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

AVF Control Number: AVF-VSR-82.1087
87-03-10-TEL

Ada[®] COMPILER
VALIDATION SUMMARY REPORT:
International Business Machines Corporation
IBM Development System for the Ada Language System, Version 1.1.0
IBM 4381 under VM/SP CMS

Completion of On-Site Testing:
19 May 1987

Prepared By:
Ada Validation Facility
ASD/SCOL
Wright-Patterson AFB OH 45433-6503

Prepared For:
Ada Joint Program Office
United States Department of Defense
Washington, D.C.

[®]Ada is a registered trademark of the United States Government
(Ada Joint Program Office).

Ada® Compiler Validation Summary Report:

Compiler Name:

IBM Development System for the Ada Language System, Version 1.1.0

Host:

IBM 4381 under
VM/SP CMS, Release 3.6

Target:

IBM 4381 under
VM/SP CMS, Release 3.6

Testing Completed 19 May 1987 Using ACVC 1.8

This report has been reviewed and is approved.

Steven P. Wilson

Ada Validation Facility

Steven P. Wilson

ASD/SCOL

Wright-Patterson AFB OH 45433-6503

John F. Kramer

Ada Validation Organization

Dr. John F. Kramer

Institute for Defense Analyses

Alexandria VA

Virginia L. Castor

Ada Joint Program Office

Virginia L. Castor

Director

Department of Defense

Washington DC

| | |
|--------------------|-------------------------------------|
| Accession For | |
| NTIS GRA&I | <input checked="" type="checkbox"/> |
| DTIC TAB | <input type="checkbox"/> |
| Unannounced | <input type="checkbox"/> |
| Justification | |
| By _____ | |
| Distribution/ | |
| Availability Codes | |
| Dist | Avail and/or Special |
| A-1 | |



EXECUTIVE SUMMARY

This Validation Summary Report (VSR) summarizes the results and conclusions of validation testing performed on the IBM Development System for the Ada[®] Language System, Version 1.1.0, using Version 1.8 of the Ada Compiler Validation Capability (ACVC). The IBM Development System for the Ada Language System is hosted on an IBM 4381 operating under VM/SP CMS, Release 3.6. Programs processed by this compiler may be executed on an IBM 4381 operating under VM/SP CMS, Release 3.6.

Testing was performed 18 May 1987 through 19 May 1987 at International Business Machines Corporation, San Diego CA, under the direction of the Ada Validation Facility (AVF), according to Ada Validation Organization (AVO) policies and procedures. The AVF identified 2102 of the 2399 tests in ACVC Version 1.8 to be processed during on-site testing of the compiler. The 19 tests withdrawn at the time of validation testing, as well as the 278 executable tests that make use of floating-point precision exceeding that supported by the implementation, were not processed. After the 2102 tests were processed, results for Class A, C, D, and E tests were examined for correct execution. Compilation listings for Class B tests were analyzed for correct diagnosis of syntax and semantic errors. Compilation and link results of Class L tests were analyzed for correct detection of errors. There were 62 of the processed tests determined to be inapplicable. The remaining 2040 tests were passed.

The results of validation are summarized in the following table:

| RESULT | CHAPTER | | | | | | | | | | | | | TOTAL |
|--------------|---------|-----|-----|-----|-----|----|-----|-----|-----|----|-----|-----|------|-------|
| | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 14 | | |
| Passed | 93 | 205 | 280 | 243 | 160 | 97 | 137 | 262 | 107 | 32 | 217 | 207 | 2040 | |
| Failed | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Inapplicable | 23 | 120 | 140 | 4 | 1 | 0 | 2 | 0 | 23 | 0 | 1 | 26 | 340 | |
| Withdrawn | 0 | 5 | 5 | 0 | 0 | 1 | 1 | 2 | 4 | 0 | 1 | 0 | 19 | |
| TOTAL | 116 | 330 | 425 | 247 | 161 | 98 | 140 | 264 | 134 | 32 | 219 | 233 | 2399 | |

The AVF concludes that these results demonstrate acceptable conformity to ANSI/MIL-STD-1815A Ada.

[®]Ada is a registered trademark of the United States Government
(Ada Joint Program Office).

TABLE OF CONTENTS

| | | |
|------------|---|-----|
| CHAPTER 1 | INTRODUCTION | |
| 1.1 | PURPOSE OF THIS VALIDATION SUMMARY REPORT | 1-2 |
| 1.2 | USE OF THIS VALIDATION SUMMARY REPORT | 1-2 |
| 1.3 | REFERENCES | 1-3 |
| 1.4 | DEFINITION OF TERMS | 1-3 |
| 1.5 | ACVC TEST CLASSES | 1-4 |
| CHAPTER 2 | CONFIGURATION INFORMATION | |
| 2.1 | CONFIGURATION TESTED | 2-1 |
| 2.2 | IMPLEMENTATION CHARACTERISTICS | 2-2 |
| CHAPTER 3 | TEST INFORMATION | |
| 3.1 | TEST RESULTS | 3-1 |
| 3.2 | SUMMARY OF TEST RESULTS BY CLASS | 3-1 |
| 3.3 | SUMMARY OF TEST RESULTS BY CHAPTER | 3-2 |
| 3.4 | WITHDRAWN TESTS | 3-2 |
| 3.5 | INAPPLICABLE TESTS | 3-2 |
| 3.6 | SPLIT TESTS | 3-4 |
| 3.7 | ADDITIONAL TESTING INFORMATION | 3-4 |
| 3.7.1 | Prevalidation | 3-4 |
| 3.7.2 | Test Method | 3-5 |
| 3.7.3 | Test Site | 3-5 |
| APPENDIX A | DECLARATION OF CONFORMANCE | |
| APPENDIX B | APPENDIX F OF THE Ada STANDARD | |
| APPENDIX C | TEST PARAMETERS | |
| APPENDIX D | WITHDRAWN TESTS | |

CHAPTER

INTRODUCTION

→ This Validation Summary Report ~~describes~~ describes the extent to which a specific Ada compiler conforms to the Ada Standard, ANSI/MIL-STD-1815A. This report explains all technical terms used within it and thoroughly reports the results of testing this compiler using the Ada Compiler Validation Capability (ACVC). An Ada compiler must be implemented according to the Ada Standard, and any implementation-dependent features must conform to the requirements of the Ada Standard. The Ada Standard must be implemented in its entirety, and nothing can be implemented that is not in the Standard.

Even though all validated Ada compilers conform to the Ada Standard, it must be understood that some differences do exist between implementations. The Ada Standard permits some implementation dependencies--for example, the maximum length of identifiers or the maximum values of integer types. Other differences between compilers result from characteristics of particular operating systems, hardware, or implementation strategies. All of the dependencies observed during the process of testing this compiler are given in this report.

The information in this report is derived from the test results produced during validation testing. The validation process includes submitting a suite of standardized tests, the ACVC, as inputs to an Ada compiler and evaluating the results. The purpose of validating is to ensure conformity of the compiler to the Ada Standard by testing that the compiler properly implements legal language constructs and that it identifies and rejects illegal language constructs. The testing also identifies behavior that is implementation dependent but permitted by the Ada Standard. Six classes of tests are used. These tests are designed to perform checks at compile time, at link time, and during execution.

Key: ... Ada programing ...

INTRODUCTION

1.1 PURPOSE OF THIS VALIDATION SUMMARY REPORT

This VSR documents the results of the validation testing performed on an Ada compiler. Testing was carried out for the following purposes:

- . To attempt to identify any language constructs supported by the compiler that do not conform to the Ada Standard
- . To attempt to identify any unsupported language constructs required by the Ada Standard
- . To determine that the implementation-dependent behavior is allowed by the Ada Standard

Testing of this compiler was conducted by SofTech, Inc., under the direction of the AVF according to policies and procedures established by the Ada Validation Organization (AVO). On-site testing was conducted from 18 May 1987 through 19 May 1987 at International Business Machines Corporation, San Diego CA.

1.2 USE OF THIS VALIDATION SUMMARY REPORT

Consistent with the national laws of the originating country, the AVO may make full and free public disclosure of this report. In the United States, this is provided in accordance with the "Freedom of Information Act" (5 U.S.C. #552). The results of this validation apply only to the computers, operating systems, and compiler versions identified in this report.

The organizations represented on the signature page of this report do not represent or warrant that all statements set forth in this report are accurate and complete, or that the subject compiler has no nonconformities to the Ada Standard other than those presented. Copies of this report are available to the public from:

Ada Information Clearinghouse
Ada Joint Program Office
OUSDRE
The Pentagon, Rm 3D-139 (Fern Street)
Washington DC 20301-3081

or from:

Ada Validation Facility
ASD/SCOL
Wright-Patterson AFB OH 45433-6503

INTRODUCTION

Questions regarding this report or the validation test results should be directed to the AVF listed above or to:

Ada Validation Organization
Institute for Defense Analyses
1801 North Beauregard Street
Alexandria VA 22311

1.3 REFERENCES

1. Reference Manual for the Ada Programming Language, ANSI/MIL-STD-1815A, February 1983.
2. Ada Validation Organization: Procedures and Guidelines, Ada Joint Program Office, 1 January 1987.
3. Ada Compiler Validation Capability Implementers' Guide, SofTech, Inc., December 1984.

1.4 DEFINITION OF TERMS

| | |
|--------------|--|
| ACVC | The Ada Compiler Validation Capability. A set of programs that evaluates the conformity of a compiler to the Ada language specification, ANSI/MIL-STD-1815A. |
| Ada Standard | ANSI/MIL-STD-1815A, February 1983. |
| Applicant | The agency requesting validation. |
| AVF | The Ada Validation Facility. In the context of this report, the AVF is responsible for conducting compiler validations according to established policies and procedures. |
| AVO | The Ada Validation Organization. In the context of this report, the AVO is responsible for setting procedures for compiler validations. |
| Compiler | A processor for the Ada language. In the context of this report, a compiler is any language processor, including cross-compilers, translators, and interpreters. |
| Failed test | A test for which the compiler generates a result that demonstrates nonconformity to the Ada Standard. |
| Host | The computer on which the compiler resides. |

INTRODUCTION

| | |
|-------------------|--|
| Inapplicable test | A test that uses features of the language that a compiler is not required to support or may legitimately support in a way other than the one expected by the test. |
| Passed test | A test for which a compiler generates the expected result. |
| Target | The computer for which a compiler generates code. |
| Test | A program that checks a compiler's conformity regarding a particular feature or features to the Ada Standard. In the context of this report, the term is used to designate a single test, which may comprise one or more files. |
| Unapplicable test | A test found to be incorrect and not used to check conformity to the Ada language specification. A test may be incorrect because it has an invalid test objective, fails to meet its test objective, or contains illegal or erroneous use of the language. |

1.5 ACVC TEST CLASSES

Conformity to the Ada Standard is measured using the ACVC. The ACVC contains both legal and illegal Ada programs structured into six test classes: A, B, C, D, E, and L. The first letter of a test name identifies the class to which it belongs. Class A, C, D, and E tests are executable, and special program units are used to report their results during execution. Class B tests are expected to produce compilation errors. Class L tests are expected to produce link errors.

Class A tests check that legal Ada programs can be successfully compiled and executed. However, no checks are performed during execution to see if the test objective has been met. For example, a Class A test checks that reserved words of another language (other than those already reserved in the Ada language) are not treated as reserved words by an Ada compiler. A Class A test is passed if no errors are detected at compile time and the program executes to produce a PASSED message.

Class B tests check that a compiler detects illegal language usage. Class B tests are not executable. Each test in this class is compiled and the resulting compilation listing is examined to verify that every syntax or semantic error in the test is detected. A Class B test is passed if every illegal construct that it contains is detected by the compiler.

Class C tests check that legal Ada programs can be correctly compiled and executed. Each Class C test is self-checking and produces a PASSED, FAILED, or NOT APPLICABLE message indicating the result when it is executed.

Class D tests check the compilation and execution capacities of a compiler. Since there are no capacity requirements placed on a compiler by the Ada Standard for some parameters--for example, the number of identifiers

INTRODUCTION

permitted in a compilation or the number of units in a library--a compiler may refuse to compile a Class D test and still be a conforming compiler. Therefore, if a Class D test fails to compile because the capacity of the compiler is exceeded, the test is classified as inapplicable. If a Class D test compiles successfully, it is self-checking and produces a PASSED or FAILED message during execution.

Each Class E test is self-checking and produces a NOT APPLICABLE, PASSED, or FAILED message when it is compiled and executed. However, the Ada Standard permits an implementation to reject programs containing some features addressed by Class E tests during compilation. Therefore, a Class E test is passed by a compiler if it is compiled successfully and executes to produce a PASSED message, or if it is rejected by the compiler for an allowable reason.

Class L tests check that incomplete or illegal Ada programs involving multiple, separately compiled units are detected and not allowed to execute. Class L tests are compiled separately and execution is attempted. A Class L test passes if it is rejected at link time--that is, an attempt to execute the main program must generate an error message before any declarations in the main program or any units referenced by the main program are elaborated.

Two library units, the package REPORT and the procedure CHECK_FILE, support the self-checking features of the executable tests. The package REPORT provides the mechanism by which executable tests report PASSED, FAILED, or NOT APPLICABLE results. It also provides a set of identity functions used to defeat some compiler optimizations allowed by the Ada Standard that would circumvent a test objective. The procedure CHECK_FILE is used to check the contents of text files written by some of the Class C tests for chapter 14 of the Ada Standard. The operation of these units is checked by a set of executable tests. These tests produce messages that are examined to verify that the units are operating correctly. If these units are not operating correctly, then the validation is not attempted.

The text of the tests in the ACVC follow conventions that are intended to ensure that the tests are reasonably portable without modification. For example, the tests make use of only the basic set of 55 characters, contain lines with a maximum length of 72 characters, use small numeric values, and place features that may not be supported by all implementations in separate tests. However, some tests contain values that require the test to be customized according to implementation-specific values--for example, an illegal file name. A list of the values used for this validation is provided in Appendix C.

A compiler must correctly process each of the tests in the suite and demonstrate conformity to the Ada Standard by either meeting the pass criteria given for the test or by showing that the test is inapplicable to the implementation. The applicability of a test to an implementation is considered each time the implementation is validated. A test that is inapplicable for one validation is not necessarily inapplicable for a subsequent validation.

INTRODUCTION

Any test that was determined to contain an illegal language construct or an erroneous language construct is withdrawn from the ACVC and, therefore, is not used in testing a compiler. The tests withdrawn at the time of validation are given in Appendix D.

CHAPTER 2

CONFIGURATION INFORMATION

2.1 CONFIGURATION TESTED

The candidate compilation system for this validation was tested under the following configuration:

Compiler: IBM Development System for the Ada Language System,
Version 1.1.0

ACVC Version: 1.8

Certificate Number: 870518W1.08064

Host Computer:

| | |
|-------------------|------------------------|
| Machine: | IBM 4381 |
| Operating System: | VM/SP CMS, Release 3.6 |
| Memory Size: | 32 megabytes |

Target Computer:

| | |
|-------------------|------------------------|
| Machine: | IBM 4381 |
| Operating System: | VM/SP CMS, Release 3.6 |
| Memory Size: | 32 megabytes |

CONFIGURATION INFORMATION

2.2 IMPLEMENTATION CHARACTERISTICS

One of the purposes of validating compilers is to determine the behavior of a compiler in those areas of the Ada Standard that permit implementations to differ. Class D and E tests specifically check for such implementation differences. However, tests in other classes also characterize an implementation. This compiler is characterized by the following interpretations of the Ada Standard:

- Capacities.

The compiler correctly processes tests containing loop statements nested to 65 levels, block statements nested to 65 levels, and recursive procedures separately compiled as subunits nested to 10 levels. It correctly processes a compilation containing 723 variables in the same declarative part. (See tests D55A03A..H (8 tests), D56001B, D64005E..G (3 tests), and D29002K.)

- Universal integer calculations.

An implementation is allowed to reject universal integer calculations having values that exceed `SYSTEM.MAX_INT`. This implementation does not reject such calculations and processes them correctly. (See tests D4A002A, D4A002B, D4A004A, and D4A004B.)

- Predefined types.

This implementation supports the additional predefined type `SHORT_INTEGER`, in the package `STANDARD`. (See tests B86001C and B86001D.)

- Based literals.

An implementation is allowed to reject a based literal with a value exceeding `SYSTEM.MAX_INT` during compilation, or it may raise `NUMERIC_ERROR` or `CONSTRAINT_ERROR` during execution. This implementation raises `NUMERIC_ERROR` during execution. (See test E24101A.)

- Array types.

An implementation is allowed to raise `NUMERIC_ERROR` or `CONSTRAINT_ERROR` for an array having a `'LENGTH` that exceeds `STANDARD.INTEGER'LAST` and/or `SYSTEM.MAX_INT`.

CONFIGURATION INFORMATION

A packed BOOLEAN array having a 'LENGTH exceeding INTEGER'LAST raises NUMERIC_ERROR when the array type is declared. (See test C52103X.)

A packed two-dimensional BOOLEAN array with more than INTEGER'LAST components raises NUMERIC_ERROR when the array subtype is declared. (See test C52104Y.)

A null array with one dimension of length greater than INTEGER'LAST may raise NUMERIC_ERROR or CONSTRAINT_ERROR either when declared or assigned. Alternatively, an implementation may accept the declaration. However, lengths must match in array slice assignments. This implementation raises NUMERIC_ERROR when the array type is declared. (See test E52103Y.)

In assigning one-dimensional array types, the expression appears to be evaluated in its entirety before CONSTRAINT_ERROR is raised when checking whether the expression's subtype is compatible with the target's subtype. In assigning two-dimensional array types, the expression does not appear to be evaluated in its entirety before CONSTRAINT_ERROR is raised when checking whether the expression's subtype is compatible with the target's subtype. (See test C52013A.)

. Discriminated types.

During compilation, an implementation is allowed to either accept or reject an incomplete type with discriminants that is used in an access type definition with a compatible discriminant constraint. This implementation accepts such subtype indications. (See test E38104A.)

In assigning record types with discriminants, the expression appears to be evaluated in its entirety before CONSTRAINT_ERROR is raised when checking whether the expression's subtype is compatible with the target's subtype. (See test C52013A.)

. Aggregates.

In the evaluation of a multi-dimensional aggregate, the order in which choices are evaluated and index subtype checks are made appears to depend upon the aggregate itself. (See tests C43207A and C43207B.)

In the evaluation of an aggregate containing subaggregates, all choices are not evaluated before being checked for identical bounds. (See test E43212B.)

CONFIGURATION INFORMATION

All choices are evaluated before `CONSTRAINT_ERROR` is raised if a bound in a nonnull range of a nonnull aggregate does not belong to an index subtype. (See test E43211B.)

. Functions.

An implementation may allow the declaration of a parameterless function and an enumeration literal having the same profile in the same immediate scope, or it may reject the function declaration. If it accepts the function declaration, the use of the enumeration literal's identifier denotes the function. This implementation rejects the declaration. (See test E66001D.)

. Representation clauses.

The Ada Standard does not require an implementation to support representation clauses. If a representation clause is not supported, then the implementation must reject it. While the operation of representation clauses is not checked by Version 1.8 of the ACVC, they are used in testing other language features. This implementation accepts 'SIZE and 'STORAGE_SIZE for tasks, 'STORAGE_SIZE for collections, and 'SMALL clauses. Enumeration representation clauses, including those that specify noncontiguous values, appear to be supported. (See tests C55B16A, C87B62A, C87B62B, C87B62C, and BC1002A.)

. Pragmas.

The pragma `INLINE` is not supported for procedures or functions. (See tests CA3004E and CA3004F.)

. Input/output.

The package `SEQUENTIAL_IO` cannot be instantiated with unconstrained array types and record types with discriminants. The package `DIRECT_IO` cannot be instantiated with unconstrained array types and record types with discriminants without defaults. (See tests AE2101C, AE2101H, CE2201D, CE2201E, and CE2401D.)

An existing text file can be opened in `OUT_FILE` mode, can be created in `OUT_FILE` mode, and can be created in `IN_FILE` mode. (See test EE3102C.)

More than one internal file can be associated with each external file for text I/O for reading only. (See tests CE3111A..E (5 tests).)

CONFIGURATION INFORMATION

More than one internal file can be associated with each external file for sequential I/O for reading only. (See tests CE2107A..F (6 tests).)

More than one internal file can be associated with each external file for direct I/O for reading only. (See tests CE2107A..F (6 tests).)

An external file associated with more than one internal file cannot be deleted. (See test CE2110B.)

Generics.

Generic subprogram declarations and bodies cannot be compiled in separate compilations. (See test CA2009F.)

Generic package declarations and bodies cannot be compiled in separate compilations. (See tests CA2009C and BC3205D.)

CHAPTER 3

TEST INFORMATION

3.1 TEST RESULTS

Version 1.8 of the ACVC contains 2399 tests. When validation testing of the IBM Development System for the Ada Language System was performed, 19 tests had been withdrawn. The remaining 2380 tests were potentially applicable to this validation. The AVF determined that 340 tests were inapplicable to this implementation, and that the 2040 applicable tests were passed by the implementation.

The AVF concludes that the testing results demonstrate acceptable conformity to the Ada Standard.

3.2 SUMMARY OF TEST RESULTS BY CLASS

| RESULT | TEST CLASS | | | | | | TOTAL |
|--------------|------------|-----|------|----|----|----|-------|
| | A | B | C | D | E | L | |
| Passed | 67 | 862 | 1053 | 16 | 11 | 31 | 2040 |
| Failed | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Inapplicable | 2 | 5 | 315 | 1 | 2 | 15 | 340 |
| Withdrawn | 0 | 7 | 12 | 0 | 0 | 0 | 19 |
| TOTAL | 69 | 874 | 1380 | 17 | 13 | 46 | 2399 |

TEST INFORMATION

3.3 SUMMARY OF TEST RESULTS BY CHAPTER

| RESULT | CHAPTER | | | | | | | | | | | | | TOTAL |
|--------------|---------|-----|-----|-----|-----|----|-----|-----|-----|----|-----|-----|--|-------|
| | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 14 | | |
| Passed | 93 | 205 | 280 | 243 | 160 | 97 | 137 | 262 | 107 | 32 | 217 | 207 | | 2040 |
| Failed | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 |
| Inapplicable | 23 | 120 | 140 | 4 | 1 | 0 | 2 | 0 | 23 | 0 | 1 | 26 | | 340 |
| Withdrawn | 0 | 5 | 5 | 0 | 0 | 1 | 1 | 2 | 4 | 0 | 1 | 0 | | 19 |
| Total | 116 | 330 | 425 | 247 | 161 | 98 | 140 | 264 | 134 | 32 | 219 | 233 | | 2399 |

3.4 WITHDRAWN TESTS

The following 19 tests were withdrawn from ACVC Version 1.8 at the time of this validation:

| | | | |
|---------|---------|---------|----------------------|
| C32114A | B37401A | B49006A | C92005A |
| B33203C | C41404A | B4A010C | C940ACA |
| C34018A | B45116A | B74101B | CA3005A..D (4 tests) |
| C35904A | C48008A | C87B50A | BC3204C |

See Appendix D for the reason that each of these tests was withdrawn.

3.5 INAPPLICABLE TESTS

Some tests do not apply to all compilers because they make use of features that a compiler is not required by the Ada Standard to support. Others may depend on the result of another test that is either inapplicable or withdrawn. The applicability of a test to an implementation is considered each time a validation is attempted. A test that is inapplicable for one validation is not necessarily inapplicable for a subsequent attempt. For this validation attempt, 340 tests were inapplicable for the reasons indicated:

- . C34001E, B52004D, B55B09C, and C55B07A use LONG_INTEGER which is not supported by this compiler.
- . C34001F and C35702A use SHORT_FLOAT which is not supported by this compiler.

TEST INFORMATION

- . C34001G and C35702B use LONG_FLOAT which is not supported by this compiler.
- . C52008B declares a record type with four discriminants of type integer and having default values. The type may be used in the declaration of unconstrained objects, but the size of these objects exceeds the maximum object size of this implementation, and NUMERIC_ERROR is raised.
- . D64005G is inapplicable because it makes use of nested procedures as subunits to a level of 17 which exceeds the capacity of the compiler.
- . A66001D requires a predefined numeric type other than those defined by the Ada language in package STANDARD. There is no such type for this implementation.
- . C86001F redefines package SYSTEM, but TEXT_IO is made obsolete by this new definition in this implementation and the test cannot be executed since the package REPORT is dependent on the package TEXT_IO.
- . BA1011C, CA1012A, CA2009C, CA2009F, LA5008A..H (8 tests), LA5008J, LA5008M, LA5008N, and BC3205D compile generic specifications and bodies in separate compilations which is not supported by this compiler.
- . CA3004E, EA3004C, and LA3004A use INLINE pragma for procedures which is not supported by this compiler.
- . CA3004F, EA3004D, and LA3004B use INLINE pragma for functions which is not supported by this compiler.
- . LA5008I and LA5008K are inapplicable because, in this implementation, a generic unit is made obsolete by the recompilation of a unit on which the generic body (but not the specification) depends. Since this implementation does not support separate compilation of generic unit specifications and bodies, a generic specification must be considered obsolete whenever the body is found to be obsolete. These tests should report at link time that the body of a generic unit is obsolete. However, a compile-time error message reports that the generic unit is obsolete.
- . AE2101C, CE2201D, and CE2201E use an instantiation of package SEQUENTIAL_IO with unconstrained array types which is not supported by this compiler.
- . AE2101H and CE2401D use an instantiation of package DIRECT_IO with unconstrained array types which is not supported by this compiler.

TEST INFORMATION

- CE2102D..F (3 tests), CE2102I, and CE2102J raise NAME_ERROR, and CE2108A, CE2108C, CE2111A, and CE2111E raise USE_ERROR when an attempt is made to close an empty file. CMS does not allow empty files to exist. CE2108B and CE2108D depend upon the successful execution of tests CE2108A and CE2108C, respectively.
- CE2107B..E (4 tests), CE2110B, CE3111B..E (4 tests), and CE3114B, are inapplicable because multiple internal files cannot be associated with the same external file. The proper exception is raised when multiple access is attempted.

The following 278 tests require a floating-point accuracy that exceeds the maximum of six supported by the implementation:

| | | |
|-----------------------|-----------------------|-----------------------|
| C24113C..Y (23 tests) | C35708C..Y (23 tests) | C45421C..Y (23 tests) |
| C35705C..Y (23 tests) | C35802C..Y (23 tests) | C45424C..Y (23 tests) |
| C35706C..Y (23 tests) | C45241C..Y (23 tests) | C45521C..Z (24 tests) |
| C35707C..Y (23 tests) | C45321C..Y (23 tests) | C45621C..Z (24 tests) |

3.6 SPLIT TESTS

If one or more errors do not appear to have been detected in a Class B test because of compiler error recovery, then the test is split into a set of smaller tests that contain the undetected errors. These splits are then compiled and examined. The splitting process continues until all errors are detected by the compiler or until there is exactly one error per split. Any Class A, Class C, or Class E test that cannot be compiled and executed because of its size is split into a set of smaller subtests that can be processed.

Splits were required for eight Class B tests:

| | | | |
|---------|---------|---------|---------|
| B97101E | BA3006A | BA3007B | BA3008B |
| BA1101C | BA3006B | BA3008A | BA3013A |

3.7 ADDITIONAL TESTING INFORMATION

3.7.1 Prevalidation

Prior to validation, a set of test results for ACVC Version 1.8 produced by the IBM Development System for the Ada Language System was submitted to the AVF by the applicant for review. Analysis of these results demonstrated that the compiler successfully passed all applicable tests, and that the compiler exhibited the expected behavior on all inapplicable tests.

3.7.2 Test Method

Testing of the IBM Development System for the Ada Language System using ACVC Version 1.8 was conducted on-site by a validation team from the AVF. The configuration consisted of an IBM 4381 host operating under VM/SP CMS, Release 3.6, and an IBM 4381 target operating under VM/SP CMS, Release 3.6.

A magnetic tape containing all tests except for withdrawn tests and tests requiring unsupported floating-point precisions was taken on-site by the validation team for processing. Tests that make use of implementation-specific values were customized before being written to the magnetic tape. Tests requiring splits during the prevalidation testing were included in their split form on the magnetic tape.

The contents of the magnetic tape were loaded directly onto the host computer. After the test files were loaded to disk, the full set of tests was compiled on the IBM 4381, and all executable tests were linked and run on the IBM 4381 using six batch streams. Results were printed.

The compiler was tested using command scripts provided by TeleSoft, Inc., and reviewed by the validation team. The tests were compiled with all default options in effect except for the following:

| <u>Option</u> | <u>Effect</u> |
|---------------|--|
| CLEAN | deletes object files produced by test execution after each test is executed |
| RUN/TEXT | causes test program to be executed and captures all terminal/console I/O to a disk file |
| LIST/ERRI | produces a compilation listing with interspersed errors (B tests only) |
| ERROR/LIST | produces a compilation listing with interspersed syntactic or semantic errors (executables only) |

Tests were compiled, linked, and executed (as appropriate) using a single computer. Test output, compilation listings, and job logs were captured on magnetic tape and archived at the AVF. The listings examined on-site by the validation team were also archived.

3.7.3 Test Site

The validation team arrived at TeleSoft, Inc., San Diego CA on 18 May 1987. Testing was completed on 19 May 1987.

APPENDIX A

DECLARATION OF CONFORMANCE

International Business Machines Corporation has submitted the following declaration of conformance concerning the IBM Development System for the Ada Language System.

DECLARATION OF CONFORMANCE


Compiler Implementor: TeleSoft
Ada Validation Facility: ASD/SCOL, Wright-Patterson AFB, OH
Ada Compiler Validation Capability (ACVC), Version 1.8

Base Configuration

Base Compiler Name: IBM Development System for the Ada[®] Language System, Version 1.1.0
Host Architecture ISA: IBM 4381
Operating System: VM/SP CMS, Release 3.6
Target Architecture ISA: IBM 4381
Operating System: VM/SP CMS, Release 3.6

Implementor's Declaration

I, the undersigned, representing TeleSoft have implemented no deliberate extensions to the Ada Language Standard ANSI/MIL-STD-1815A in the compiler listed in this declaration. I declare that International Business Machines Corporation is the owner of record of the object code of the Ada language compiler listed above and, as such, is responsible for maintaining said compiler in conformance to ANSI/MIL-STD-1815A. All certificates and registrations for the Ada language compiler listed in this declaration shall be made only in the owner's corporate name.




TeleSoft

Raymond A. Parra, Director, Contracts & Legal

Date: 5/28/87

Owner's Declaration

I, the undersigned, representing International Business Machines Corporation take full responsibility for implementation and maintenance of the Ada compiler listed above, and agree to the public disclosure of the final Validation Summary Report. I further agree to continue to comply with the Ada trademark policy, as defined by the Ada Joint Program Office. I declare that all of the Ada language compilers listed, and their host/target performance are in compliance with the Ada Language Standard ANSI/MIL-STD-1815A.


International Business Machines Corporation
James R. Hamilton

Date: 87/05/28

"Ada" is a registered trademark of the U.S. Government, Ada Joint Program Office.

APPENDIX B

APPENDIX F OF THE Ada STANDARD

The only allowed implementation dependencies correspond to implementation-dependent pragmas, to certain machine-dependent conventions as mentioned in chapter 13 of MIL-STD-1815A, and to certain allowed restrictions on representation clauses. The implementation-dependent characteristics of the IBM Development System for the Ada Language System, Version 1.1.0, are described in the following sections which discuss topics in Appendix F of the Ada Language Reference Manual (ANSI/MIL-STD-1815A). Implementation-specific portions of the package STANDARD are also included in this appendix.

package STANDARD is

...

type INTEGER is range $-(2^{31}) .. (2^{31})-1$;
type SHORT_INTEGER is range $-(2^{15}) .. (2^{15})-1$;
type FLOAT is digits 6 range $-7.237005146E+75 .. 7.237005146E+75$;
type DURATION is delta 2#1.0#E-14 range $-86400.0 .. 86400.0$;

...

end STANDARD;

APPENDIX F

OF THE LANGUAGE REFERENCE MANUAL

The Ada language definition allows for certain target dependencies in a controlled manner. This section, called Appendix F as prescribed in the LRM, describes implementation-dependent characteristics of the IBM Development System for the Ada language System, Version 1.1.0, running under CMS.

1. Implementation-Defined Pragmas

`pragma INTERFACE(Assembly, <subroutine_name>);`

`pragma SUPPRESS(<condition_name>, on => <name>);`

where: <condition_name> is one of: `access_check`, `discriminant_check`, `index_check`, `length_check`, `range_check`, `division_check`, `elaboration_check`, `storage_check`.

`pragma ELABORATE(<library_unit_name> {, <library_unit_name> });`

Specifies order of elaboration for the mentioned library units.

`pragma PRIORITY (<priority_type>);`

Specifies priority for a task.

2. Implementation-Defined Attributes

There are no implementation-defined attributes.

3. Package SYSTEM

The current specification of package SYSTEM is provided below.

PACKAGE System IS

 TYPE Address is Access Integer;

 TYPE Name IS (mc68000, anuyk44, ibm370);

 System_Name : CONSTANT name := ibm370;

 Storage_Unit : CONSTANT := 8;

 Memory_Size : CONSTANT := 2**24-1;

-- System-Dependent Named Numbers:

 Min_Int : CONSTANT := -(2 ** 31);

 Max_Int : CONSTANT := (2 ** 31) - 1;

 Max_Digits : CONSTANT := 6;

 Max_Mantissa : CONSTANT := 31;

 Fine_Delta : CONSTANT := 1.0 / (2 ** (Max_Mantissa - 1));

 Tick : CONSTANT := 1.0 / (10 ** 6);

-- Other System-Dependent Declarations

```

TYPE Display_Info is array (1 .. 17) of Address;
TYPE Subprogram_Value is record
    Entry_Point_Address : Address;
    Display : Display_Info;
end record;
SUBTYPE Priority IS Integer RANGE 0 .. 255;

```

end SYSTEM;

4. Representation Clauses

This implementation supports address, length, enumeration, and record representation clauses.

5. Implementation-Generated Names

There are no implementation-generated names denoting implementation-dependent components. Names generated by the compiler shall not interfere with programmer-defined names.

6. Address Clause Expression Interpretation

Expressions that appear in Address clauses, including those for interrupts, are interpreted as virtual memory addresses.

7. Unchecked Conversion Restrictions

Unchecked conversions are allowed between types (or subtypes) T1 and T2 provided that:

- (1) They have the same static size.
- (2) They are not private.

8. Implementation-Dependent Characteristics of the I/O Packages

- Sequential_IO, Direct_IO, and Text_IO are supported.
- Low_Level_IO is not supported.
- Unconstrained array types and unconstrained types with discriminants may not be instantiated for I/O.
- File names follow the conventions and restrictions of the target operating system.
- In Text_IO, the type Field is defined as follows: subtype Field is integer range 0..1000;
- In Text_IO, the type Count is defined as follows: type Count is range 0..2_147_483_646;

9. Package STANDARD

The current specification of package STANDARD includes:

```

type INTEGER is range -(2**31) .. (2**31)-1;
type SHORT_INTEGER is range -(2**15) .. (2**15)-1;

```

type FLOAT is digits 6 range -7.237005146E+75 .. 7.237005146E+75
type DURATION is delta 2#1.0#E-14 range -86400.0 .. 86400.0;

10. Compilation of Generic Units

The declaration, body, and any subunits of a generic unit must be submitted as a single compilation (i.e., must be in the same source file).

11. Restrictions on Machine Code Insertions

Machine code insertions are not supported.

APPENDIX C

TEST PARAMETERS

Certain tests in the ACVC make use of implementation-dependent values, such as the maximum length of an input line and invalid file names. A test that makes use of such values is identified by the extension .TST in its file name. Actual values to be substituted are represented by names that begin with a dollar sign. A value must be substituted for each of these names before the test is run. The values used for this validation are given below.

| <u>Name and Meaning</u> | <u>Value</u> |
|--|---|
| \$BIG_ID1 Identifier the size of the maximum input line length with varying last character. | (1..199 =>'A', 200 =>'1') |
| \$BIG_ID2 Identifier the size of the maximum input line length with varying last character. | (1..199 =>'A', 200 =>'2') |
| \$BIG_ID3 Identifier the size of the maximum input line length with varying middle character. | (1..100 102..200 =>'A', 101 =>'3') |
| \$BIG_ID4 Identifier the size of the maximum input line length with varying middle character. | (1..100 102..200 =>'A', 101 =>'4') |
| \$BIG_INT_LIT An integer literal of value 298 with enough leading zeroes so that it is the size of the maximum line length. | (1..197 =>'0', 198..200 =>"298") |

TEST PARAMETERS

| <u>Name and Meaning</u> | <u>Value</u> |
|--|---|
| \$BIG_REAL_LIT A real literal that can be either of floating- or fixed-point type, has value 690.0, and has enough leading zeroes to be the size of the maximum line length. | (1..194 =>'0', 195..200 =>"69.0E1") |
| \$BLANKS A sequence of blanks twenty characters fewer than the size of the maximum line length. | (1..180 =>' ') |
| \$COUNT_LAST A universal integer literal whose value is TEXT_IO.COUNT'LAST. | 2_147_483_645 |
| \$EXTENDED_ASCII_CHARS A string literal containing all the ASCII characters with printable graphics that are not in the basic 55 Ada character set. | "abcdefghijklmnopqrstuvwxyz" & "!\$%?@`{}~" |
| \$FIELD_LAST A universal integer literal whose value is TEXT_IO.FIELD'LAST. | 1000 |
| \$FILE_NAME_WITH_BAD_CHARS An illegal external file name that either contains invalid characters, or is too long if no invalid characters exist. | "X}%! #&~Y" |
| \$FILE_NAME_WITH_WILD_CARD_CHAR An external file name that either contains a wild card character, or is too long if no wild card character exists. | "XYZ#" |
| \$GREATER_THAN_DURATION A universal real value that lies between DURATION'BASE'LAST and DURATION'LAST if any, otherwise any value in the range of DURATION. | 86_401.0 |
| \$GREATER_THAN_DURATION_BASE_LAST The universal real value that is greater than DURATION'BASE'LAST, if such a value exists. | +131_072.0 |

TEST PARAMETERS

| <u>Name and Meaning</u> | <u>Value</u> |
|---|--------------------|
| \$ILLEGAL_EXTERNAL_FILE_NAME1 An illegal external file name. | "BAD-CHARACTER*% " |
| \$ILLEGAL_EXTERNAL_FILE_NAME2 An illegal external file name that is different from \$ILLEGAL_EXTERNAL_FILE_NAME1. | "AAA*AAA" |
| \$INTEGER_FIRST The universal integer literal expression whose value is INTEGER'FIRST. | -(2**31) |
| \$INTEGER_LAST The universal integer literal expression whose value is INTEGER'LAST. | (2**31)-1 |
| \$LESS_THAN_DURATION A universal real value that lies between DURATION'BASE'FIRST and DURATION'FIRST if any, otherwise any value in the range of DURATION. | -86_401.0 |
| \$LESS_THAN_DURATION_BASE_FIRST The universal real value that is less than DURATION'BASE'FIRST, if such a value exists. | -131_072.0 |
| \$MAX_DIGITS The universal integer literal whose value is the maximum digits supported for floating-point types. | 6 |
| \$MAX_IN_LEN The universal integer literal whose value is the maximum input line length permitted by the implementation. | 200 |
| \$MAX_INT The universal integer literal whose value is SYSTEM.MAX_INT. | 2_147_483_647 |

TEST PARAMETERS

| <u>Name and Meaning</u> | <u>Value</u> |
|---|-----------------------------------|
| <p>\$NAME</p> <p>A name of a predefined numeric type other than FLOAT, INTEGER, SHORT_FLOAT, SHORT_INTEGER, LONG_FLOAT, or LONG_INTEGER if one exists, otherwise any undefined name.</p> | <p>SHORT_SHORT_INTEGER</p> |
| <p>\$NEG_BASED_INT</p> <p>A based integer literal whose highest order nonzero bit falls in the sign bit position of the representation for SYSTEM.MAX_INT.</p> | <p>16#FFFFFFFFE#</p> |
| <p>\$NON_ASCII_CHAR_TYPE</p> <p>An enumerated type definition for a character type whose literals are the identifier NON_NULL and all non-ASCII characters with printable graphics.</p> | <p>(NON_NULL_EBCDIC_GRAPHICS)</p> |

APPENDIX D
WITHDRAWN TESTS

Some tests are withdrawn from the ACVC because they do not conform to the Ada Standard. The following 19 tests had been withdrawn at the time of validation testing for the reasons indicated. A reference of the form "AI-ddddd" is to an Ada Commentary.

- . C32114A: An unterminated string literal occurs at line 62.
- . B33203C: The reserved word "IS" is misspelled at line 45.
- . C34018A: The call of function G at line 114 is ambiguous in the presence of implicit conversions.
- . C35904A: The elaboration of subtype declarations SFX3 and SFX4 may raise NUMERIC_ERROR instead of CONSTRAINT_ERROR as expected in the test.
- . B37401A: The object declarations at lines 126 through 135 follow subprogram bodies declared in the same declarative part.
- . C41404A: The values of 'LAST and 'LENGTH are incorrect in the if statements from line 74 to the end of the test.
- . B45116A: ARRPRIBL1 and ARRPRIBL2 are initialized with a value of the wrong type--PRIBOOL_TYPE instead of ARRPRIBOOL_TYPE--at line 41.
- . C48008A: The assumption that evaluation of default initial values occurs when an exception is raised by an allocator is incorrect according to AI-00397.
- . B49006A: Object declarations at lines 41 and 50 are terminated incorrectly with colons, and end case; is missing from line 42.
- . B4A010C: The object declaration in line 18 follows a subprogram body of the same declarative part.

WITHDRAWN TESTS

- . B74101B: The begin at line 9 causes a declarative part to be treated as a sequence of statements.
- . C87B50A: The call of "/"= at line 31 requires a use clause for package A.
- . C92005A: The "/"= for type PACK.BIG_INT at line 40 is not visible without a use clause for the package PACK.
- . C940ACA: The assumption that allocated task TT1 will run prior to the main program, and thus assign SPYNUMB the value checked for by the main program, is erroneous.
- . CA3005A..D (4 tests): No valid elaboration order exists for these tests.
- . BC3204C: The body of BC3204C0 is missing.

END

DATE

FILMED

9-88

DTIC